




NorthStar automotive batteries excel at providing both high reserve capacity and cranking amps, perfect for performance and start-stop technology applications.

- Pure lead AGM technology delivers exceptional CCA ratings and reserve capacity cycling ability
- Quick starting every time
- Cycles over 900 times at 50% depth of discharge
- Faster recharge than conventional batteries
- Proudly made in the USA at our state-of-the-art battery plant
- OEM fit is ensured - built to exact BCI standards
- Housed in advanced plastics for durability performance and heat resistance
- Advanced AGM construction means no water levels to check or terminals to clean
- Approved as non-hazardous cargo for ground sea and air transport DOT 49CFR173.159(d), (i) and (ii)

NSB-AGM24F


Nominal Technical Specifications

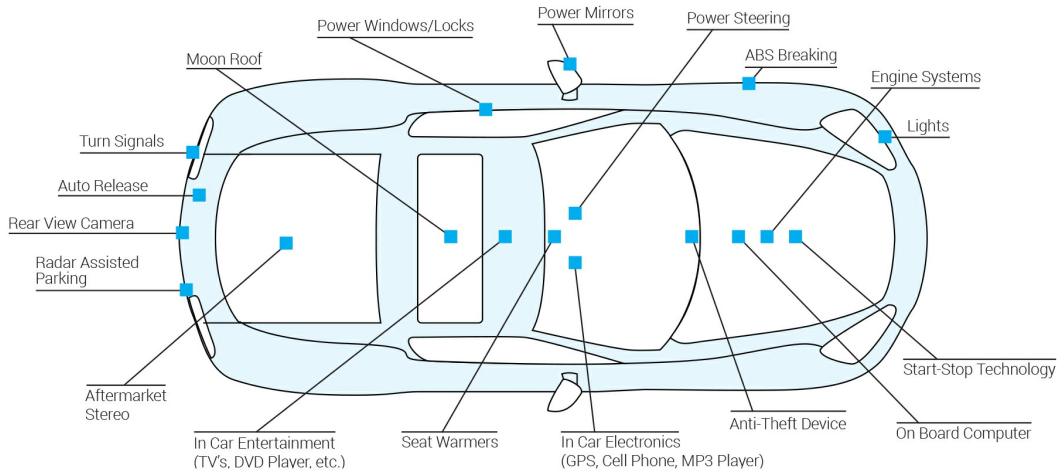

Technical data

| | |
|------------------------------------|--------------------|
| Terminal configuration | SAE |
| Terminal illustration | |
| Pulse cranking amps | 1500 A |
| CCA rating at -18°C (0°F) | 840 A |
| CA/MCA rating at 0°C (32°F) | 1000 A |
| Reserve capacity | 160 min |
| Capacity - 20 hour rate (1.75 vpc) | 76 Ah |
| Internal resistance | 3 mΩ @ 25°C (77°F) |
| Short circuit current | 3100 A |
| Warranty | 4 years full |
| Quantity per layer | 20 |
| Quantity per pallet | 40 |

Technical Drawing

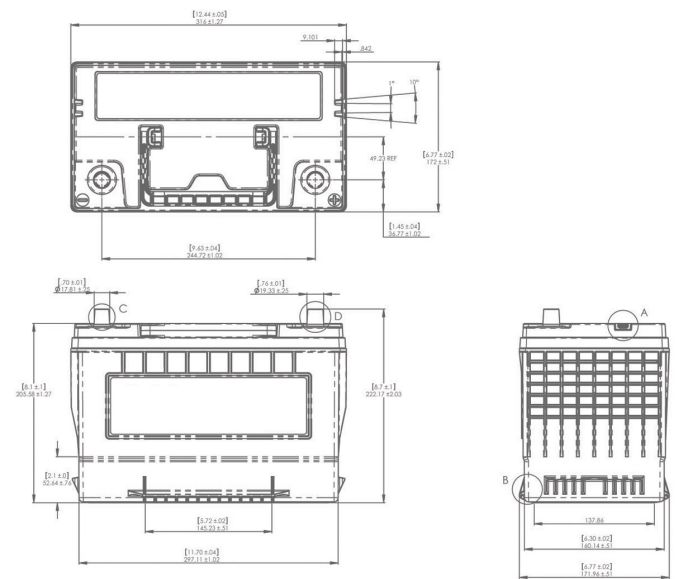

All NorthStar batteries are compliant with Battery Council International standards, UL approved and UN2800 certified. NorthStar is registered to ISO 9001 and ISO 14001.

Distributed by:

NorthStar Battery Company LLC
4000 Continental Way
Springfield, MO, 65803,
United States of America
info@northstarbattery.com
Tel: +1 417 575 8200
Fax: +1 417 575 8250

QUALITY ASSURED
ISO 9001

